Technical Manual

CS 3008

Crescendo Series 4-Way Speaker

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohms
- Power Rating: 30 to 225 watts
- Crossover Frequencies: 200Hz, 800Hz, 3000Hz
- Frequency Response: 45Hz-35kHz +/-3dB
- Sensitivity: 90dB 2.8V/1 meter

PRODUCTION HISTORY

- Introduced in 1993
- Discontinued 1996
- Original Retail Price: $1,599.00/pair

PHYSICAL SPECIFICATIONS:

- 1x - EMIT-R Tweeters
- 1x - 4" (10.2cm) IMG Midrange
- 1x - 6-1/2" (cm) Midbass Coupler
- 1x - 10" (16.5cm) IMG Woofer
- Dimensions: 39-3/8"H x 12-1/2"W" x 15"D
  100cm(H) x 31.3cm(W) x 38.1cm(D)
- Cabinet Not Sold
- Grille #A026-6735
- Crossover #A015-6745
- Logo #716-6342
- Glide Feet #826-2290
- Rod Assembly N/A
- CB1 #871-1974

TECHNICAL INFORMATION



TWEETER #902-6769
DIAPHRAGM #751-6022



MIDRANGE
#902-6770 NLA
USE #902-4585



MID-BASS
#902-6778 NLA
USE # B16D80PR-04DW-1



10" WOOFER
#902-6779 NLA
USE #902-4599

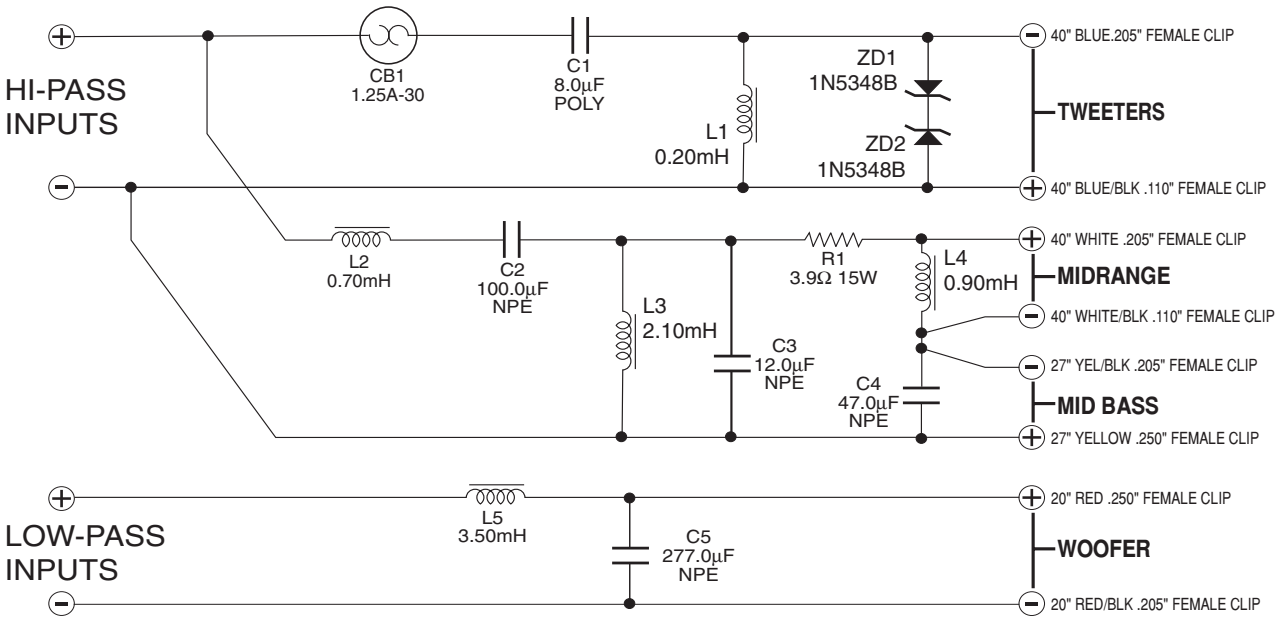

CS 3008 Crescendo Series 4-Way Speaker

INFINITY SYSTEMS INC., 250 Crossways Park Drive, Woodbury, New York 11797